



ATEX INDUSTRY LINE

- Non-electric dosing pump
- Certified for surface industries and mining industries
- Installation in zone 0, zone 1 and zone 2

In order to improve safety in professional workplaces, the European Union has set up goals for the Members States in regards to risks linked to explosive atmospheres (ATEX) :

- Directive ATEX 94/9/CE : "Manufacturer" directive concerning equipment and protective systems intended for use in potentially explosive atmospheres

- Directive ATEX 99/92/ CE : "User" directive concerning the health and safety protection of workers

Dosatron "Industry Line" ATEX certified (Manufacturer Directive) addresses dosing issues in those sensitive zones.



D3IL	Dosage		Operating flow range min. - max.		Operating pressure		Version		Certification
	%	Ratio	(l/h)	[US Pint/min - US GPM]	bar	PSI	Serial	Option	
D3IL3000EX	0.03 - 0.3	[1:3000 - 1:333]	10 - 3 000	[1/3 - 14]	0.30 - 6	4.3 - 85	VF ou AF	V K	Ex II 1 GD c IIB IIIC T6/T85°C I M1
D3IL2EX	0.2 - 2	[1:500 - 1:50]	10 - 3 000	[1/3 - 14]	0.30 - 6	4.3 - 85	VF ou AF	V K	Ex II 1 GD c IIB IIIC T6/T85°C I M1
D3IL5EX	0.5 - 5	[1:200 - 1:20]	10 - 3 000	[1/3 - 14]	0.30 - 6	4.3 - 85	VF ou AF	V K	Ex II 1 GD c IIB IIIC T6/T85°C I M1
D3IL10EX	1 - 10	[1:100 - 1:10]	10 - 3 000	[1/3 - 14]	0.50 - 6	7 - 85	VF ou AF	V K	Ex II 1 GD c IIB IIIC T6/T85°C I M1

D8IL	Dosage		Operating flow range min. - max.		Operating pressure		Version		Certification
	%	Ratio	(l/h)	[US GPM]	bar	PSI	Serial	Option	
D8IL3000EX	0.03-0.125	[1:3000 - 1:800]	500 - 8 000	[2.2 - 40]	0.15 - 8	2 - 116	VF ou AF	K	Ex II 1 GD c IIA IIIC T6/T85°C I M1
D8IL2EX	0.2 - 2	[1:500 - 1:50]	500 - 8 000	[2.2 - 40]	0.15 - 8	2 - 116	VF ou AF		Ex II 1 GD c IIA IIIC T6/T85°C I M1
D8IL5EX	1 - 5	[1:100 - 1:20]	500 - 8 000	[2.2 - 40]	0.15 - 8	2 - 116	VF ou AF		Ex II 1 GD c IIA IIIC T6/T85°C I M1


Available options

AF : for alkaline additives

VF : for acidic additives

K For highly concentrated acids (>15%)

V : kit for viscous additives recommended for more than 200 or 400 cPs (depending on model)

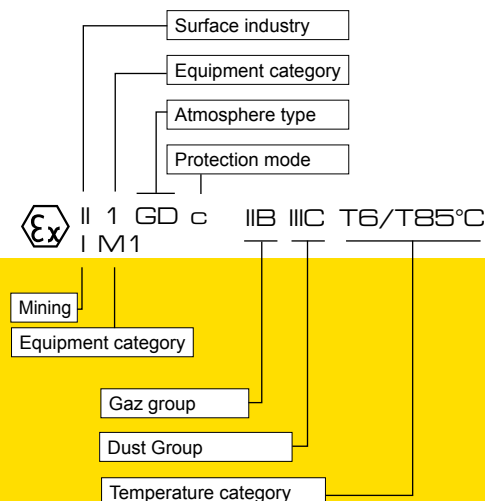

ATEX Certification

For more informations on the ATEX certification, scan the bar code

Certification level of the D3IL product range

II 1 GD c IIB IIIC T6/T85°C I M1

This injector range can be operated in surface industries (I) or mining industries (II), and installed in ATEX zones rated zone 2, zone 1 or zone 0 (equipment category 1). It is suitable for explosive atmospheres caused by gases or dust (GD). The use of the D3 product range protects from the risks linked to all gases with a Minimum Ignition Energy greater than 70 µJ (IIB), and an Auto-Ignition Temperature from 85°C (T6 T85). In addition its use protects from risks linked to all dust size (IIIC).

Certification level of the D8IL product range

II 1 GD c IIA IIIC T6/T85°C I M1

This injector range can be operated in surface industries (I) or mining industries (II), and installed in ATEX zones rated zone 2, zone 1 or zone 0 (equipment category 1). It is suitable for explosive atmospheres caused by gases or dust (GD). The use of the D8 product range protects from the risks linked to all gases with a Minimum Ignition Energy greater than 240 µJ (IIA), and an Auto-Ignition Temperature from 85°C (T6 T85). In addition its use protects from risks linked to all dust size (IIIC).


Dosatron technology

Dosatron technology is based on a hydraulic motor pump activated only by pressure and the flow of the water.

The hydraulic motor

The motor piston moves under the pressure of the water. A system of valves allows the movement to be reversed.

The dosing pump is called a VOLUMETRIC pump

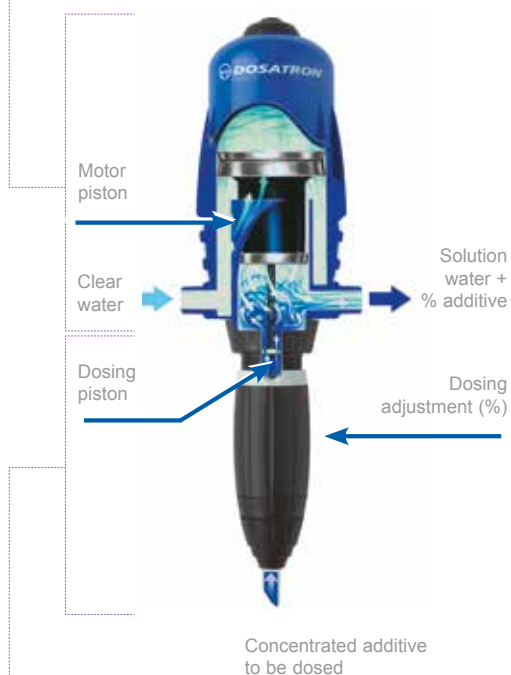

The dosing assembly

The Dosing piston driven by the motor continuously injects a fixed volume of product (adjustable capacity of the dosing body). The dosing piston will inject the quantity of product that corresponds to the volume of water passing through the motor. Therefore, the operating principle ensures constant dosing, independently of the variations in flow rate and pressure of the water.

The injection of the product is **PROPORTIONAL** to the water flow rate.

- Dosing of any additive as liquid or soluble in water
- Multiple applications, one solution.
- High accuracy dosing



DOSATRON®

Because life is powered by water



Customer service

Download our
DOSATRON app



App Store

Google play

INDUSTRY LINE

DOSATRON INTERNATIONAL S.A.S.

Rue Pascal - B.P. 6 - 33370 TRESSES (BORDEAUX) - FRANCE
Tel. 33 (0)5 57 97 11 11 - Fax. 33 (0)5 57 97 11 29 / 33 (0)5 57 97 10 85
e.mail : info@dosatron.com - <http://www.dosatron.com>

This document does not form a contractual engagement on the part of Dosatron International and is for information only. Dosatron International reserves the right to alter product specification or appearance without prior notice. © DOSATRON INTERNATIONAL S.A.S. 2015

DOCDEPGAMMEATEXEN-05/15

